




10/541887  
PCT/GB 2004 / 000067



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed *Andrew Gensey*  
Dated 3 February 2004

**BEST AVAILABLE COPY**



# The Patent Office

# 1/77

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

|   |   |   |   |
|---|---|---|---|
| 1. Your reference   | 11166P1 GB/JCM  |   |   |
| 2. Patent application number<br>(The Patent Office will fill in this part)  | 0300641.8   |   | 13JAN03 E776413-1 D02903<br>P01/7700 0.00-0300641.8 |
| 3. Full name, address and postcode of the or of each applicant (underline all surnames)   | Reckitt Benckiser (UK) Limited<br>103-105 Bath Road<br>Slough<br>Berkshire<br>SL1 3UH<br>United Kingdom |   |   |
| Patents ADP number (if you know it)   | 7972136002  |   |   |
| If the applicant is a corporate body, give the country/state of its incorporation   | England   |   |   |
| 4. Title of the invention   | Improvements in or relating to devices  |   |   |
| 5. Name of your agent (if you have one)   | John C McKnight   |   |   |
| "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)   | Reckitt Benckiser plc<br>Group Patents Department<br>Dansom Lane<br>Hull<br>HU8 7DS<br>United Kingdom   |   |   |
| Patents ADP number (if you know it)   | 07799521001   |   |   |
| 5. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number  | Country   | Priority application number<br>(if you know it) | Date of filing<br>(day / month / year)              |
| 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application   | Number of earlier application<br>(day / month / year)   | Date of filing<br>(day / month / year)          |   |
| 3. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:<br>a) any applicant named in part 3 is not an inventor, or<br>b) there is an inventor who is not named as an applicant, or<br>c) any named applicant is a corporate body.<br>See note (d)) | Yes   |   |   |

**Patents Form 1/77**

Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description

9

Claim(s)

2

Abstract

1

Drawing(s)

2 + 2

82

If you are also filing any of the following, state how many against each item.

Priority documents  
Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

1

Any other documents (please specify)

FS2

I/We request the grant of a patent on the basis of this application.

Signature

Date

John C McKnight

7 January 2003

Name and daytime telephone number of Person to contact in the United Kingdom

John C McKnight (01482 583719)

When an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office. Unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered 'Yes' Patents Form 7/77 will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patents Office.

Improvements in or relating to devices

The present invention devices useful for the perfuming,  
5 deodorising or sanitising of air with an end-of-life  
indicator.

Devices for perfuming, deodorising or sanitising of air are  
known. For example, air fresheners are now found in many  
10 rooms of houses or offices or in enclosed spaces such as  
vehicles. Recently devices comprising a high proportion of  
fragrance in a gel have been marketed under the trade mark  
"Crystal Air" by Reckitt Benckiser Plc. Such devices are  
also described in, for example, US-A-5,780,527, GB-A-  
15 2,363,717 and WO 00/24434. Typically the air freshener,  
deodoriser or sanitising element comprises above 50 wt%  
active component in a matrix of a crosslinked,  
functionalised liquid polymer held in a device such as a  
plastic or grooved glass substrate. As the device is used,  
20 the active component is released into the atmosphere. After  
a certain time, the active component is substantially used  
up, or is released at an insufficient rate.

For many types of air freshener, there is an effective end-  
25 of-life indicator. For example, with an electrically driven  
device in which a liquid composition is heated and  
evaporated, it can easily be seen when the liquid reservoir  
is empty. A perfuming candle clearly needs replacing when  
it has burnt away. It is difficult for a user of a device  
30 comprising a high proportion of an active component in a  
gelled matrix to determine when it needs replacing since  
there is no clear end-of-life indicator.

WO 00/24434 states that the end point cue is provided by the shrinkage of the gel material within the recess or recesses, which is perfectly visible. It also states that there is  
5 often cracking or tearing of the gel material. However, we have found that the shrinkage or cracking of the gel is not always a reliable indicator of end-of-life. Shrinkage is a continuous process, and it cannot easily be determined when the gel has sufficiently shrunk that the device should be  
10 replaced. Furthermore, cracking does not always occur, and when it does, the time of cracking is not necessarily the time that the device ceases to effectively fulfil its function.

15 The present invention provides a device for perfuming, deodorising or sanitising air or enclosed spaces which comprises:

a. an anhydrous gel element formed by cross-linking a functionalised liquid polymer with a crosslinking agent in  
20 the presence of a non-aqueous perfume, deodorising or sanitising base; and

b. separate timing means for proving an end-of-life indication.

25 The anhydrous gel element is described, for example, in US-A-5,780,527, GB-A-2,363,717 and WO 00/24434, herein incorporated by reference. By the term "functionalised liquid polymer" we mean a material which is liquid at room temperature and which has a viscosity of not more than 5 Pas  
30 at 25 °C, preferably from 0.25 to 1.0 Pas. Thus, for example, the functionalised liquid polymer may be selected

from maleinised polybutadiene, maleinised polyisoprene or a copolymer of ethylene and maleic anhydride and the crosslinking agent contains at least two complementary functional groups. Examples of functionalised liquid  
5 polymers are commercially available from Revertex Ltd and sold under the trade mark LITHENE. Particularly preferred are LITHENE N4-9000 10MA, LITHENE N4-B-10MA and LITHENE N4-5000-10MA. Examples of crosslinking agents are  
10 alkylpropyldiamines having an ethoxylated or propoxylated higher aliphatic chain such as those sold under the trade mark DICRODAMET by Croda Chemicals Ltd, ethoxylated or propoxylated primary fatty amines sold under the trade mark CRODAMET and polyoxyalkylenediamines such as those sold  
under the trade mark JEFFAMINE by Huntsman Corporation.

15

The non-aqueous perfume, deodorising or sanitising base generally constitutes 50 to 95wt%, preferably 60 to 90wt%, more preferably 70 to 85wt%, of the anhydrous gel element. The gel element may also comprise other components such as  
20 dyes or plasticisers.

The timing means provides the user of the device with an indication as to when the device ceases to operate effectively and must be replaced or refilled. Any timing  
25 means separate from the anhydrous gel element can be provided. In other words, the anhydrous gel element is not itself used to provide an end-of-life indication.

The timing means desirably provides an end-of-life  
30 indication 14 to 60 days from the date that the device is initiated, preferably 28 to 40 days. The duration will, of

course, depend on various factors such as the composition of the anhydrous gel element, the physical form of the device and the location of the device when it is used. Desirably the time to the end-of-life indication is set by the  
5 manufacturer of the device, but it is also possible for a user to set the duration if suitable adjustment means are provided.

The timing means is preferably actuated when the device  
10 itself is initially actuated by a single operation. However, it is possible for separate actuation means to be provided for the device and for the timing means.

Any timing means can be provided so long as it shows the  
15 desired end-of-life indication. For example, a visible or audio signal can be provided.


In a first embodiment, a further gel element can be provided. The further gel element has a different  
20 composition from the anhydrous gel element, in that it is specifically designed to shrink. By anchoring the further gel element at one end, the shrinkage of the element to the anchor point can be seen. The end-of-life indication is provided when a certain degree of shrinkage is observed, for  
25 example by the gel shrinking past an indicator such as a line embossed on the device. Desirably the further gel element is not perfumed, but it is preferably coloured to provide an attractive and highly visible appearance. It may take the form of a simple line, or a more complex shape  
30 could be used, for example a circle or circular element around the anhydrous gel element to provide a timing means

reminiscent of a stopwatch face. Such an element comprises a composition able to shrink over time, for example of gelatin or carrageenan gum.

- 5 In a second embodiment, a composition which compacts, changes state or dissolves can be provided. For example, a composition can be in the form of discrete particles, preferably spherical particles. The particles can be held in a reservoir, preferably a substantially vertical
- 10 reservoir, and slowly decay by evaporation of water and eventual coalescence at the bottom of the reservoir. The end-of-life indication can be when discrete particles are no longer visible, or when the level of particles reaches an indicated level.

15

- Any composition fulfilling the above requirement can be used, but of particular benefit is a copolymer of a substituted or unsubstituted maleic anhydride with a substituted or unsubstituted alkene. Examples of
- 20 substituted or unsubstituted maleic anhydrides are those of formula:



25



wherein  $R_1$  and  $R_2$ , which may be identical or different, are each hydrogen or alkyl, especially  $C_1$ - $C_6$  alkyl. Preferably  
5  $R_1$  and  $R_2$  are both hydrogen.

Examples of suitable alkenes are straight branched  $C_2$ - $C_{12}$  alkenes especially  $C_2$ - $C_6$  alkenes, and in particular  $C_4$  alkenes such as isobutylene.

10

The copolymer is preferred in the form of salt, especially an alkali metal salt such as a sodium salt.

A particularly preferred copolymer is isobutylene-maleic  
15 anhydride sodium copolymer obtainable from Kuraray, Osaka, Japan.

In order to obtain particles containing water the copolymer particles are simply added to water and allowed to swell.  
20 Ordinarily the swelling is allowed to proceed to completion, but controlled swelling can be used by adding a restricted amount of water or by removing the particles before swelling is completed. In this way the end-of-life timing can be controlled. It can also be controlled by an appropriate  
25 choice of copolymer, or by incorporating a water-permeable membrane between the timing means and the atmosphere to retard the loss of water from the particles.

In a third embodiment an audio signal can be provided, for  
30 example by an electrical timing circuit, preferably powered by a battery, connected to a loudspeaker. An example of

this embodiment is the same as the first or second embodiments above except that the composition is conducting, by inclusion of conducting particles such as carbon black, graphite or a metal. Once the composition passes a particular point, for example by shrinkage of a gel or dissolution of particles, a circuit could be broken. For example, two electrodes can be provided, and once the circuit between them is broken, a signal can be generated.

10 Examples of two devices constructed in accordance with the present invention will now be described with reference to the accompanying drawings, in which:

Figure 1 is a plan view of an example of the first embodiment of a device of the present invention; and

Figure 2 is a plan view an example of a second embodiment of a device of the present invention.

20 Figure 1 illustrates an adapted version of the Crystal Air (RTM) product sold by Reckitt Benckiser Plc.

This device comprises a glass body 1, one face of which is provided with a pattern of grooves 2 in which a fragranced gel 3 is deposited. The grooves are open to the ambient air such that the gel fragrances the air.

This device has now been adapted to have a further groove 4 separate from and running around the periphery of the pattern of grooves 2. This further groove 4 is filled with a second gel 5 which extends along most of the length of the

groove 4, but does not extend around the entire groove. The gel 5 is anchored in position at a first end by anchoring means such as a spike 9 and has an opposing free end 7. A marker 8 is provided adjacent to the groove 4 at a certain distance behind the free end 7.

In use when the device is activated, for example by removing a protective foil from the back of the device which covers both the pattern of grooves 2 and the further groove 4, or by removing the entire device from an air-tight container, the second gel 5 begins to shrink, such that the free end moves towards the marker 8. Eventually, the free end 7 will reach the marker 8 to provide an end-of-life indication.

In the second example shown in Figure 2, the same fragranced gel 3 is used as in the first example, but this time in a reservoir on top of the upper end of a housing 10. The gel is held in a plurality of grooves 11 to allow fragancing in a similar way as in the first example

The housing has a vertically extending chamber 12 which is externally visible, either by the housing itself being transparent or through a transparent window.

The chamber 12 is filled with a stack of spherical balls 13. These are made of a material which is designed to decay when exposed to ambient air. For example, they may be impregnated with water which evaporates over time such that the resulting structure is incapable of supporting its own mass and collapses, or the balls shrink as water is released.

Thus, a given period of time after the device is activated, for example by removing the device from an air tight container, the balls 13 will collapse into a small space at the bottom of the chamber 12. A marker 14 is preferably provided towards the bottom of the chamber 12 such that, the end-of-life is indicated by the balls collapsing below the marker 14. Although Figure 2 shows the chamber being transparent beneath the marker 14, this need not necessarily be the case, and the end-of-life may be indicated by the balls 13 disappearing from view.

Claims

1. A device for perfuming, deodorising or sanitising air or enclosed spaces which comprises:

5 a. an anhydrous gel element formed by cross-linking a functionalised liquid polymer with a crosslinking agent in the presence of a non-aqueous perfume, deodorising or sanitising base; and

10 b. separate timing means for proving an end-of-life indication.

2. A device according to claim 1 wherein the functionalised liquid polymer is selected from maleinised polybutadiene, maleinised polyisoprene or a copolymer of  
15 ethylene and maleic anhydride and the crosslinking agent contains at least two complementary functional groups.

3. A device according to claim 1 or 2 wherein the non-aqueous perfume, deodorising or sanitising base constitutes  
20 from 60 to 95wt% of the gel element.

4. A device according to any one of the preceding claims wherein the timing means comprises an additional element which visibly shrinks over the intended lifetime of the  
25 device.

5. A device according to claim 4 wherein the additional element comprises a gel which shrinks at a greater rate than said anhydrous gel element.

6. A device according to any one of claims 1 to 3 wherein the additional element comprises particles which shrink, compact or dissolve.

5 7. A device according to claim 6 wherein the particles comprise a maleic anhydride-isobutylene copolymer.

8. A device according to any one of the preceding claims wherein the timing means provides an end-of-life indication  
10 after from 28 to 40 days use of the device.

9. A device according to any one of the preceding claims which comprises actuating means which, when actuated, activates the device to release the perfuming, deodorising  
15 or sanitising substance and activates the timing means.

10. A device according to claim 9 wherein the actuating means comprises an impermeable foil which covers both the perfuming, deodorising or sanitising substance and the  
20 timing means.

AbstractImprovements in or relating to devices

5

A device for perfuming, deodorising or sanitising air or enclosed spaces which comprises:

- a. an anhydrous gel element formed by cross-linking a functionalised liquid polymer with a crosslinking agent in  
10 the presence of a non-aqueous perfume, deodorising or sanitising base; and
- b. separate timing means for proving an end-of-life indication.

15

FIG. 1.


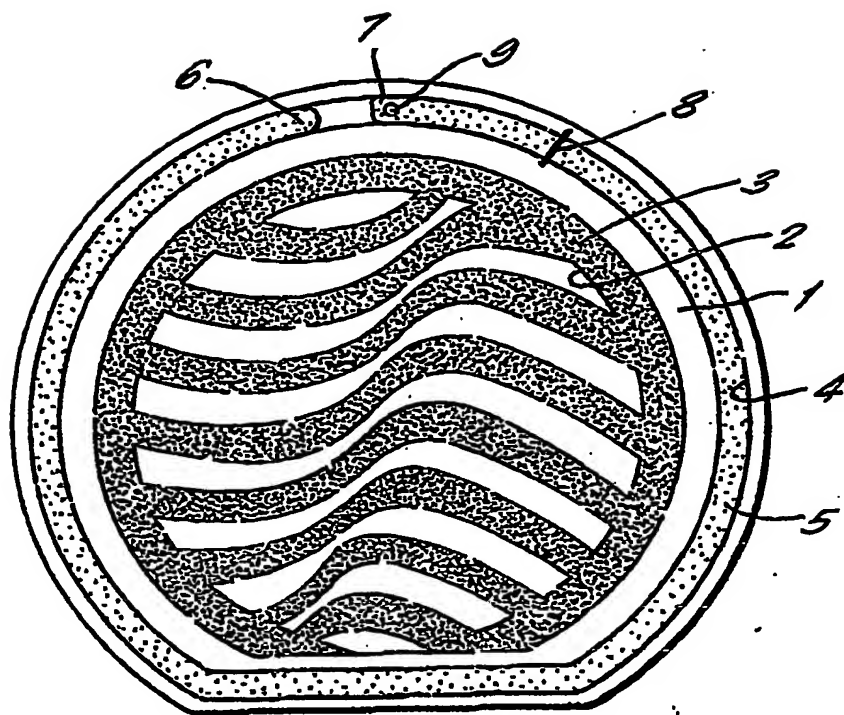




FIG. 2.

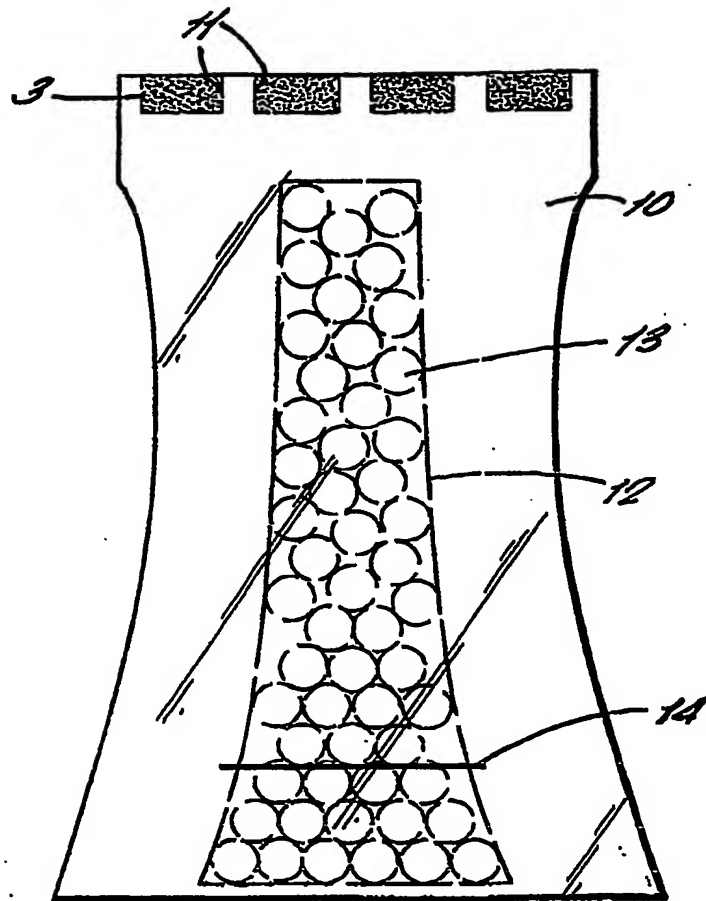

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**